



## **In-situ microbial activity in membrane-aerated biofilms for autotrophic nitrogen conversion**

**Pellicer i Nàcher, Carles; Domingo Felez, Carlos; Smets, Barth F.**

*Publication date:*  
2012

*Document Version*  
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

*Citation (APA):*

Pellicer i Nàcher, C., Domingo Felez, C., & Smets, B. F. (2012). *In-situ microbial activity in membrane-aerated biofilms for autotrophic nitrogen conversion*. Poster session presented at 14th International Symposium on Microbial Ecology, Copenhagen, Denmark.

---

### **General rights**

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.


- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.




## 1. Introduction

Membrane-aerated biofilm reactors (MABRs) are systems where oxygen diffuses through a membrane (submerged in wastewater) that serves as the substratum for biofilm growth. The counter-diffusion of nutrients within the biofilm matrix creates unique niches for the co-existence of distinct microbes.

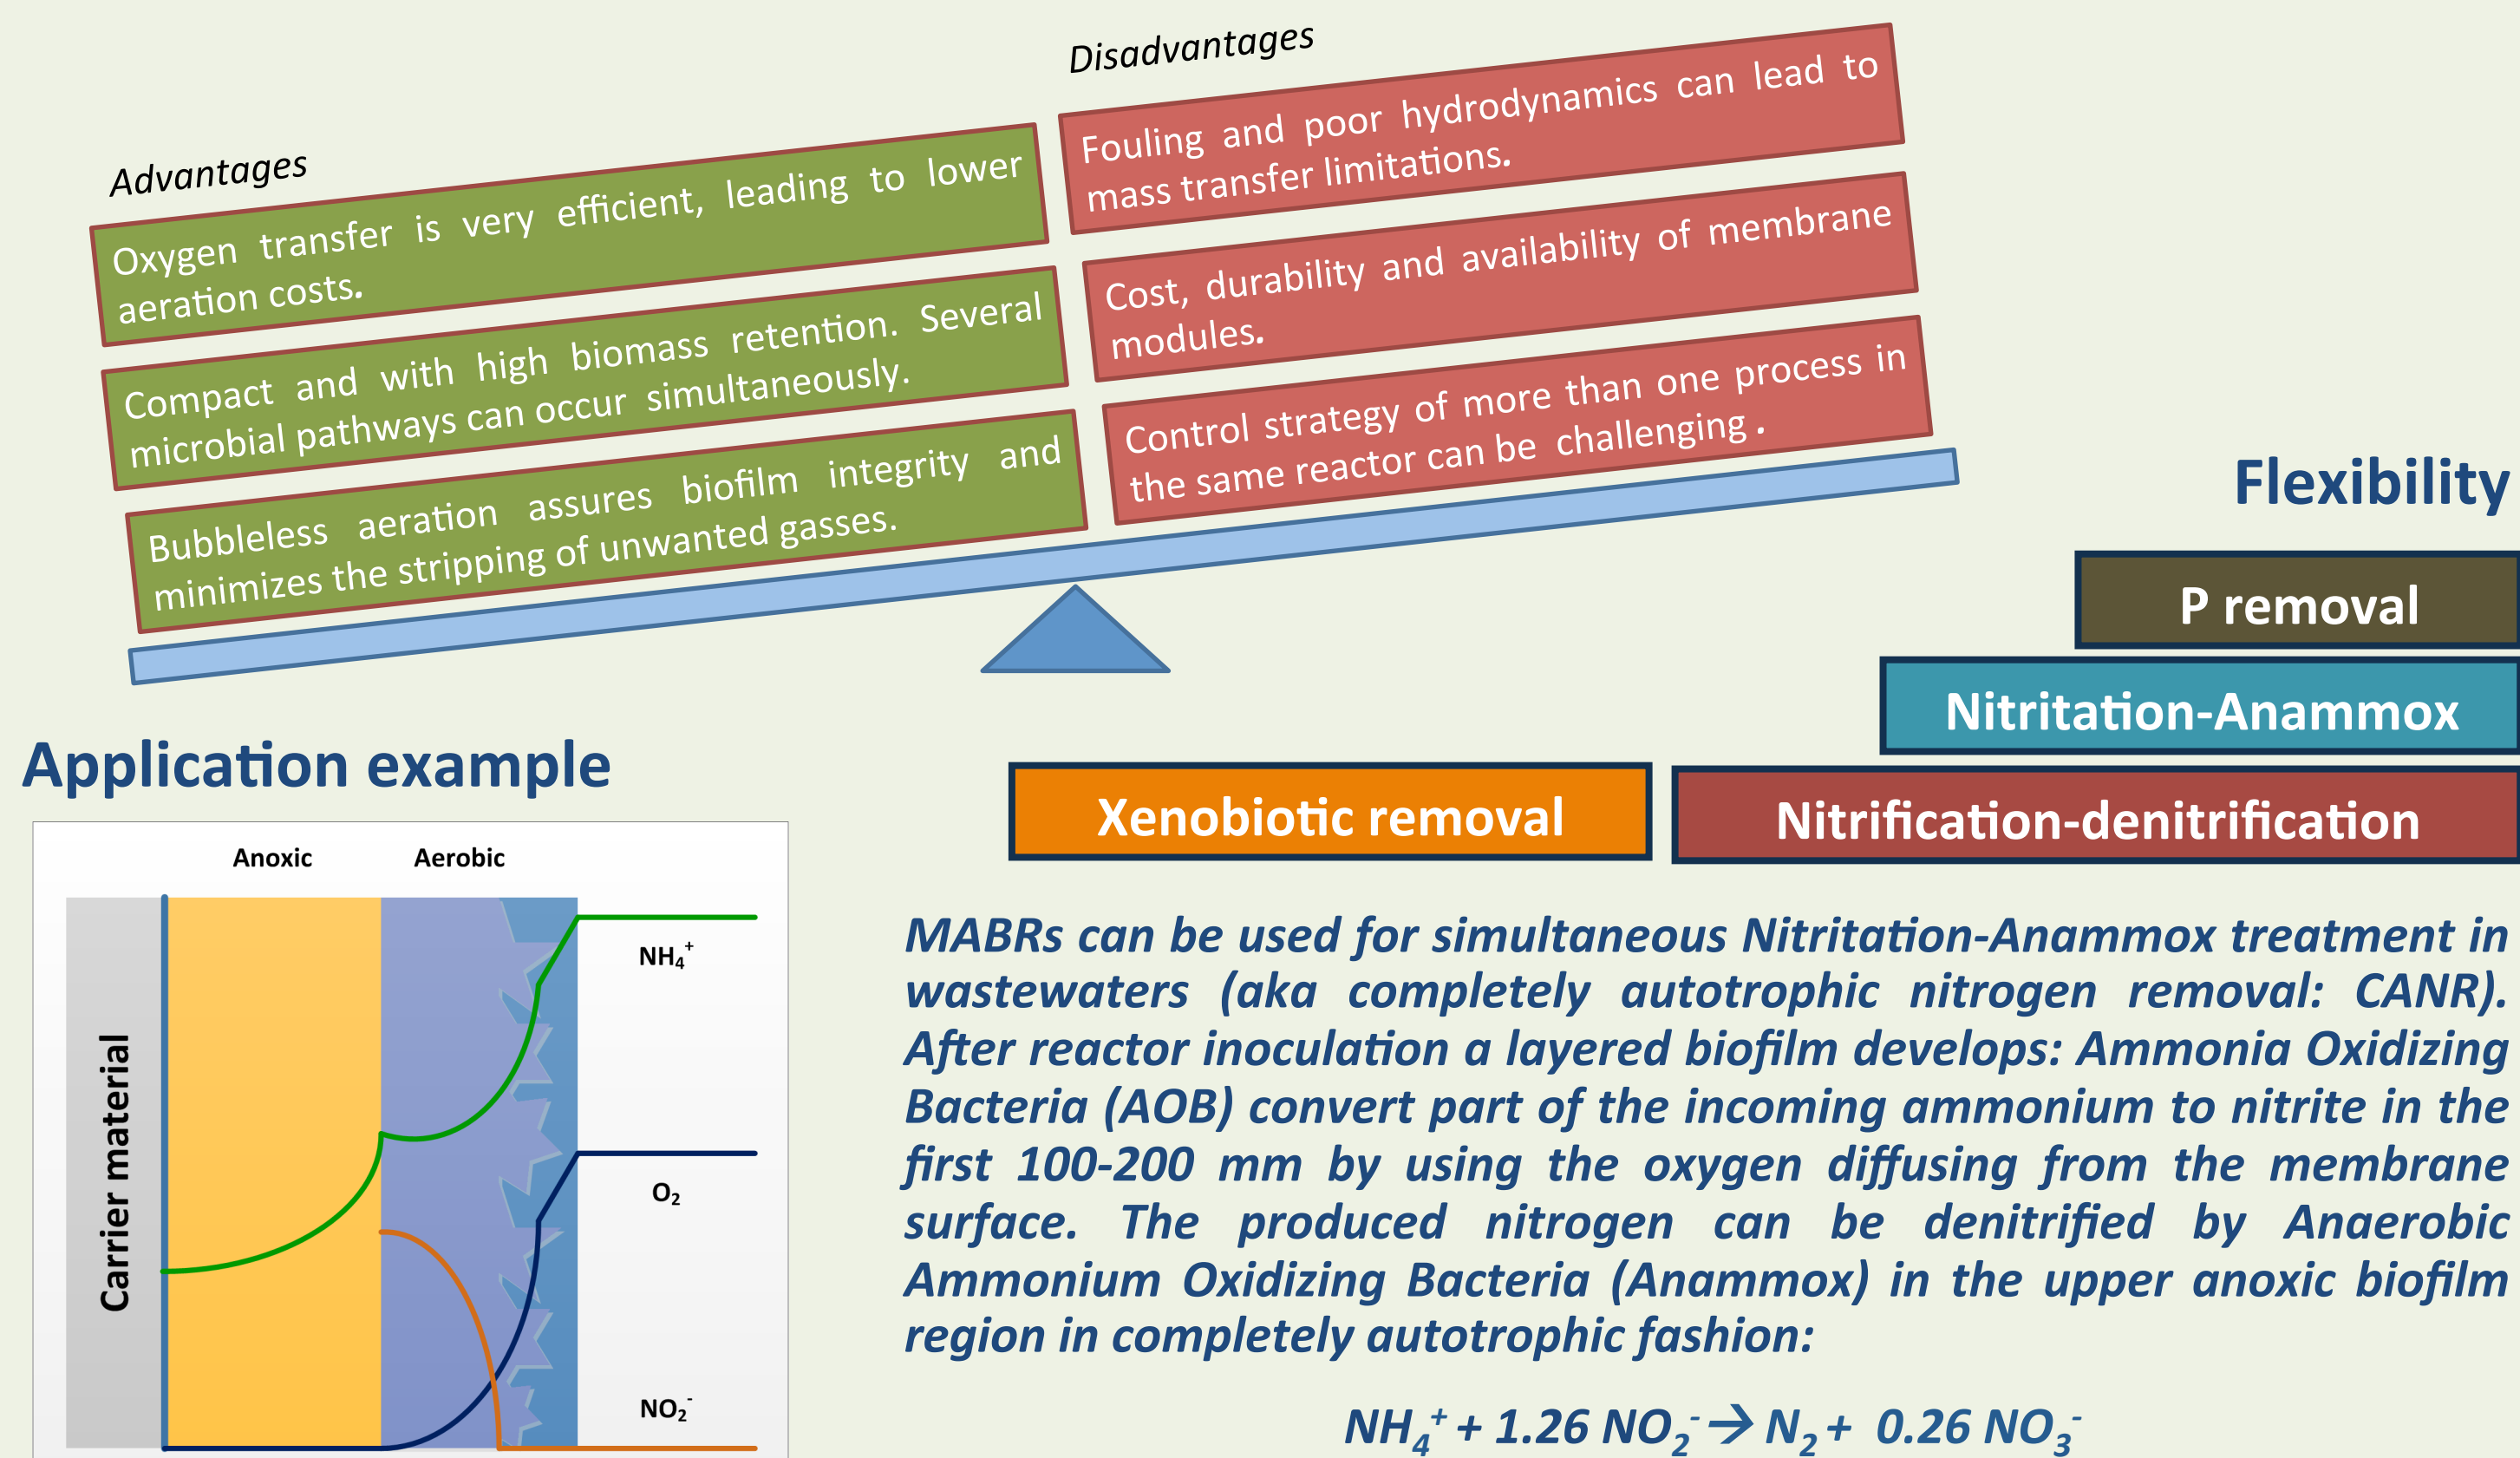

## 3. Experimental setup

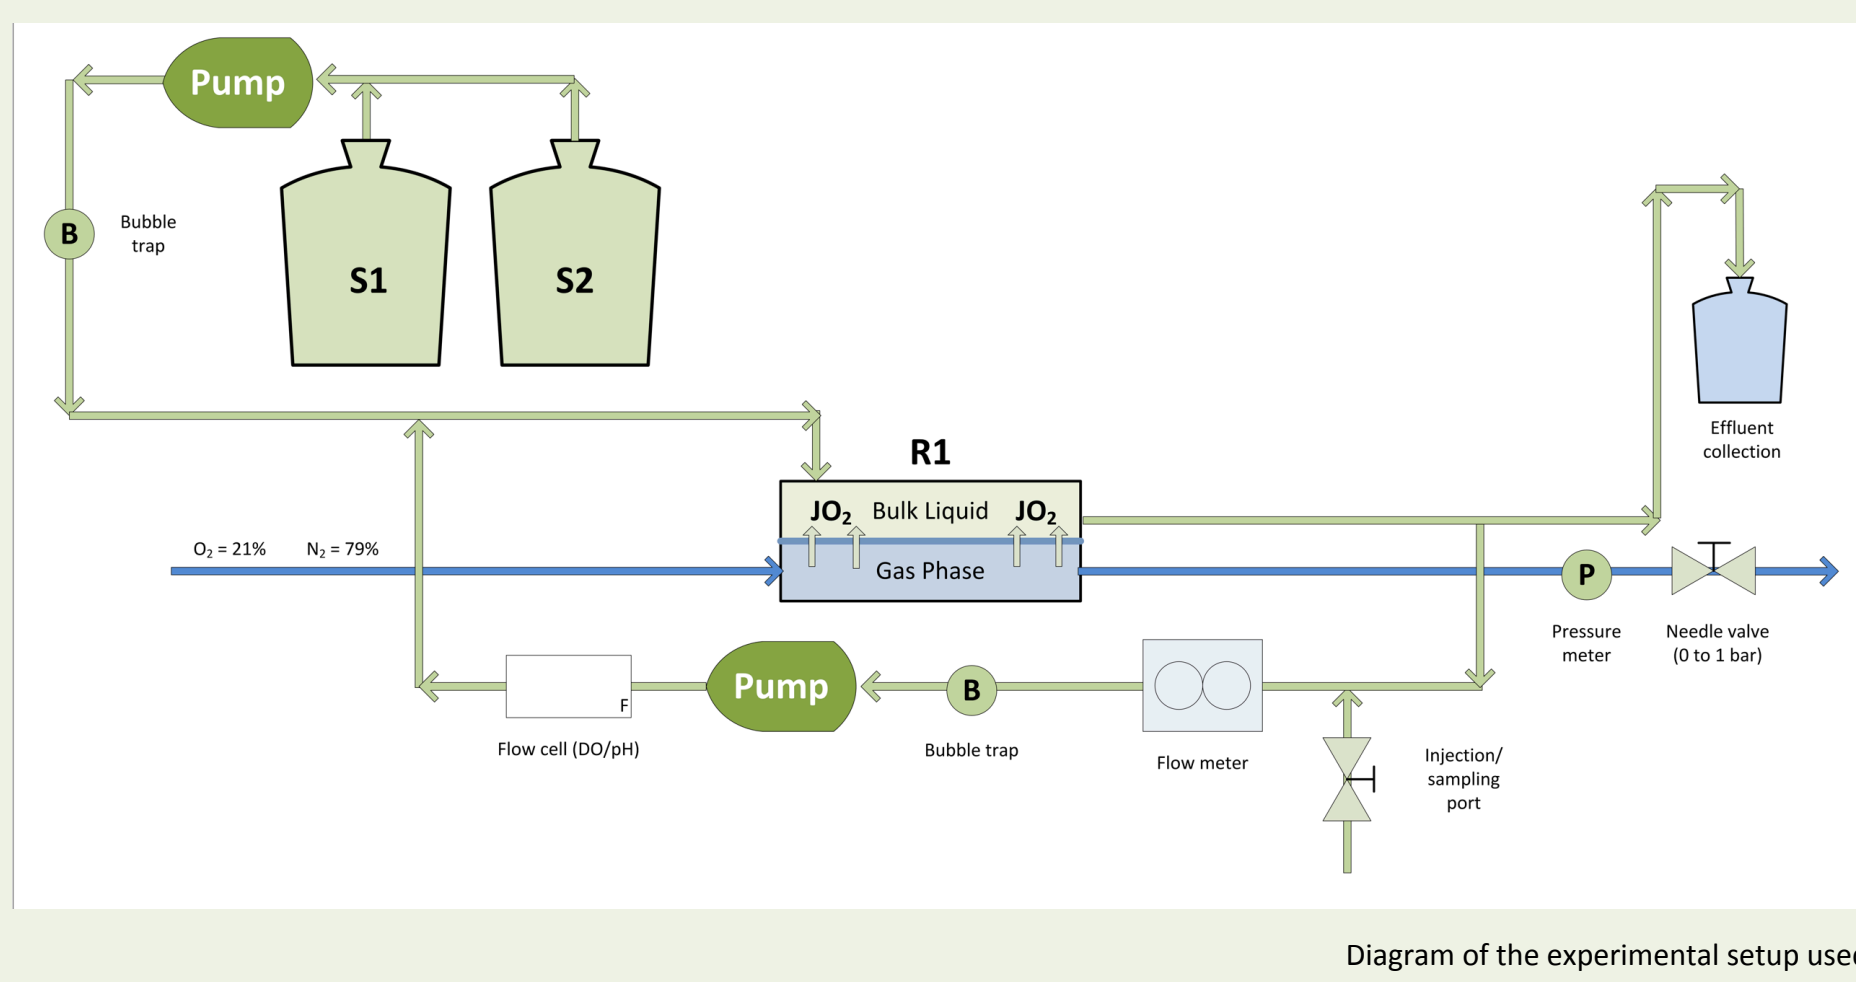


Setup characteristics:

- Silicone hollow fiber membranes (14 m<sup>2</sup>/m<sup>3</sup>).
- Lab air used as O<sub>2</sub> source.
- Innoculum from previous lab reactor performing nitrification – anammox.
- Loaded with synthetic wastewater.

The experiments:


3 Ammonium surface loads were tested (5, 11 and 29 g-N/m<sup>2</sup>/day) under the same oxygen load (100 mL/min air at 0.35 bar: 21 g-O<sub>2</sub>/m<sup>2</sup>/day in clean water)

- Bulk concentrations of N-species analyzed daily to assess reactor performance.
- Microsensor profiles at different times within an aeration cycle to detect changes in activities of the different microbial communities involved.

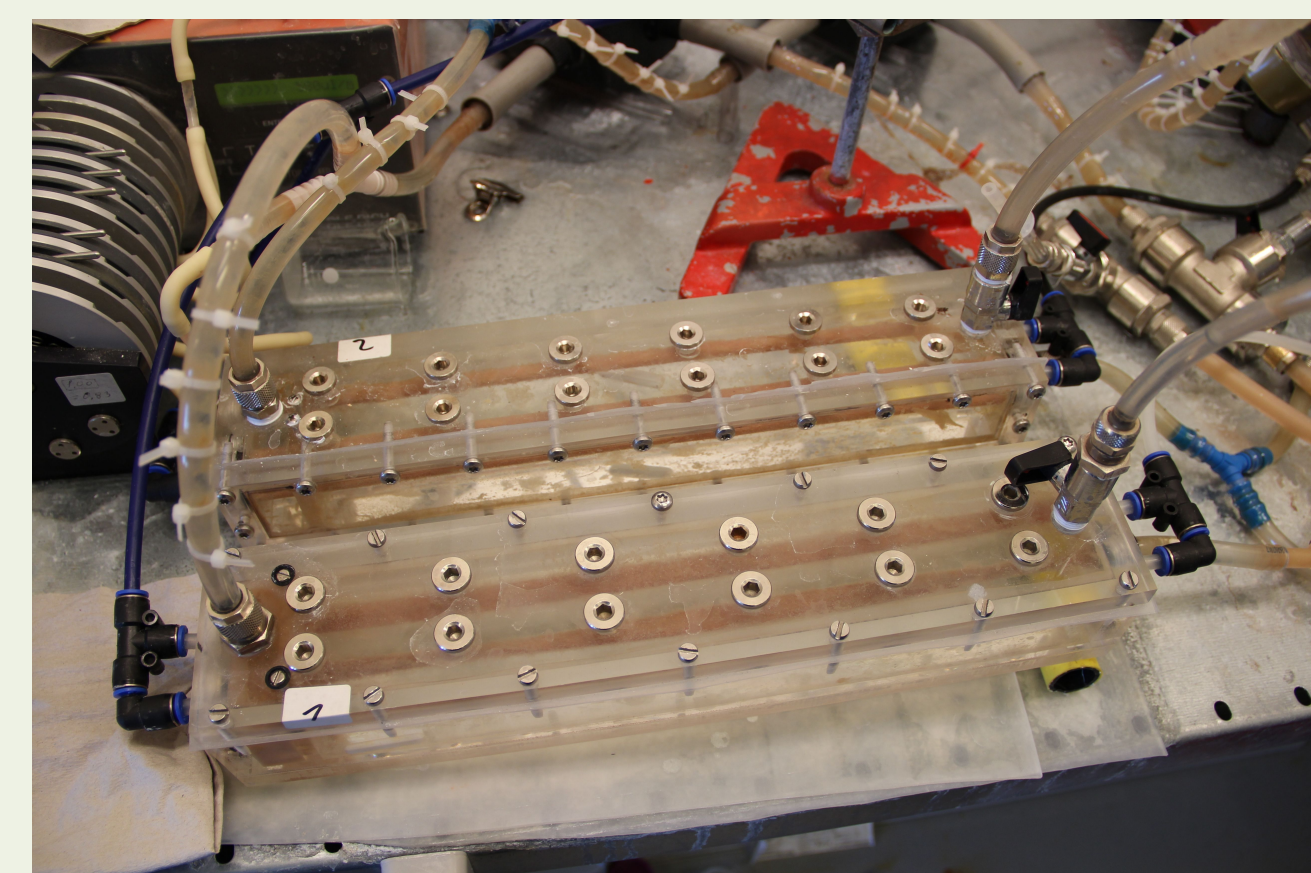

## 2. Research questions



Q1. Biofilms developed in MABRs affect significantly the Oxygen Transfer Rate (OTR) in these reactors, but how?

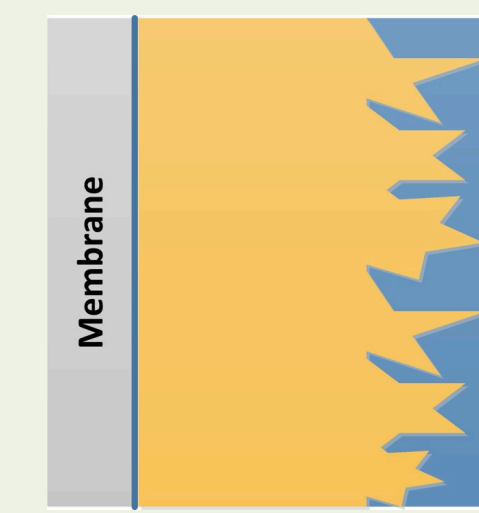

A1. Microbial activity in deep biofilm layers enhances OTRs (Pellicer-Nàcher et al. 2009, Lackner et al. 2010).



A2. Biofilm eventually increases the resistance to the oxygen mass transfer (Shanahan et al. 2006), reducing OTRs.

Q2. When MABRs for completely autotrophic N removal (CANR) are aerated in cycles of aeration / no-aeration, they show enhanced performance... why?

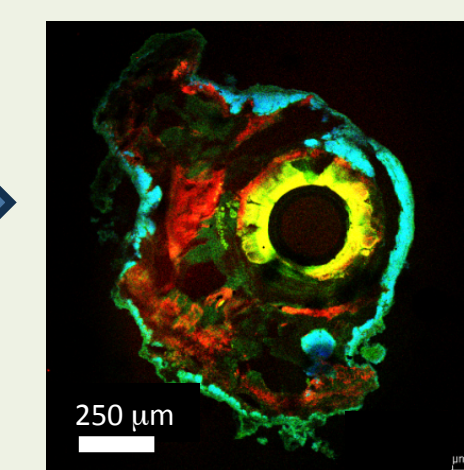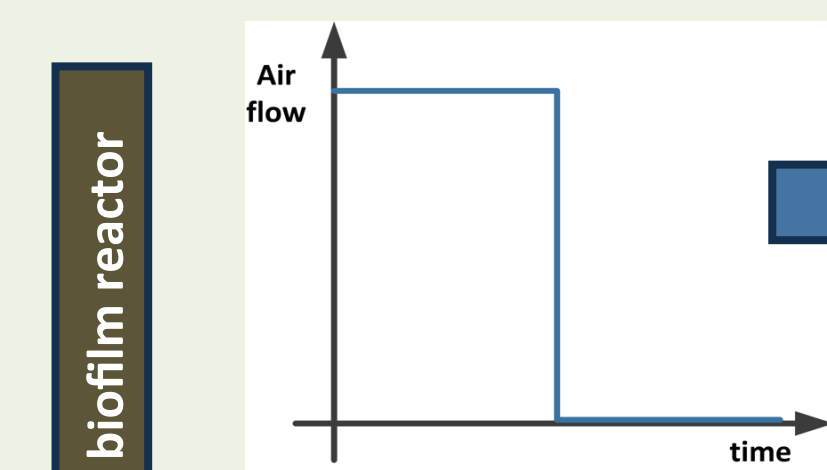

Good NO<sub>2</sub><sup>-</sup> accumulation and eventual Anammox activity (Pellicer-Nàcher et al. 2009)

FISH micrograph of a MABR biofilm for CANR (yellow: AOB, cyan: Anammox, green: Other bacteria)


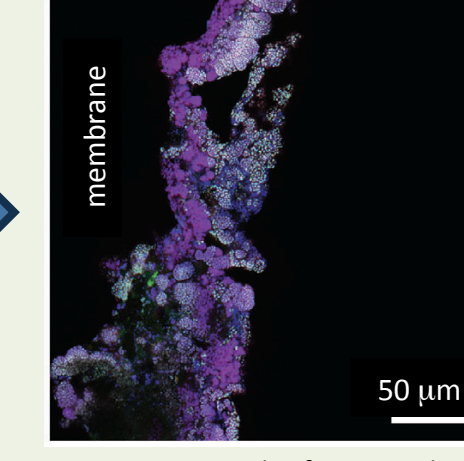
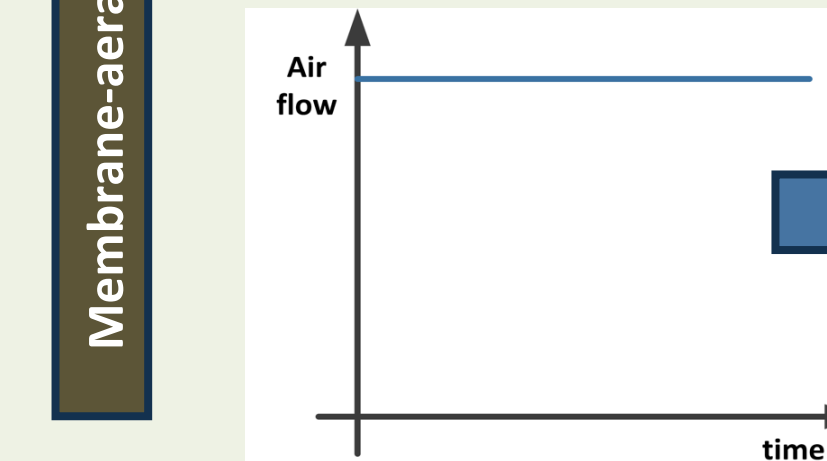


NO<sub>2</sub><sup>-</sup> accumulation occurs at lower efficiencies. Microbial community composition in inoculum plays an important role (Terada et al. 2009).



FISH micrograph of a MABR biofilm for CANR (white: *N. oligotropha*, magenta: other AOB, blue: other bacteria)

## 4. NH<sub>4</sub><sup>+</sup> surface loads enhance oxygen transfer rates


Increases in the NH<sub>4</sub><sup>+</sup> surface load produce increases in the NH<sub>4</sub><sup>+</sup> flux converted by the biofilm. Such an enhancement rises the oxygen flux diffusing from the membrane (50% higher than in clean water)

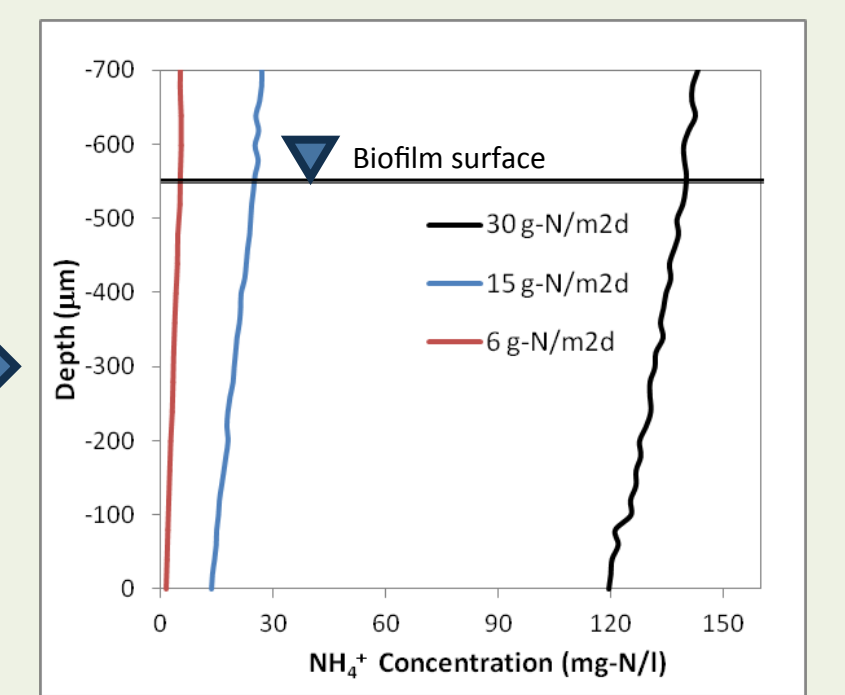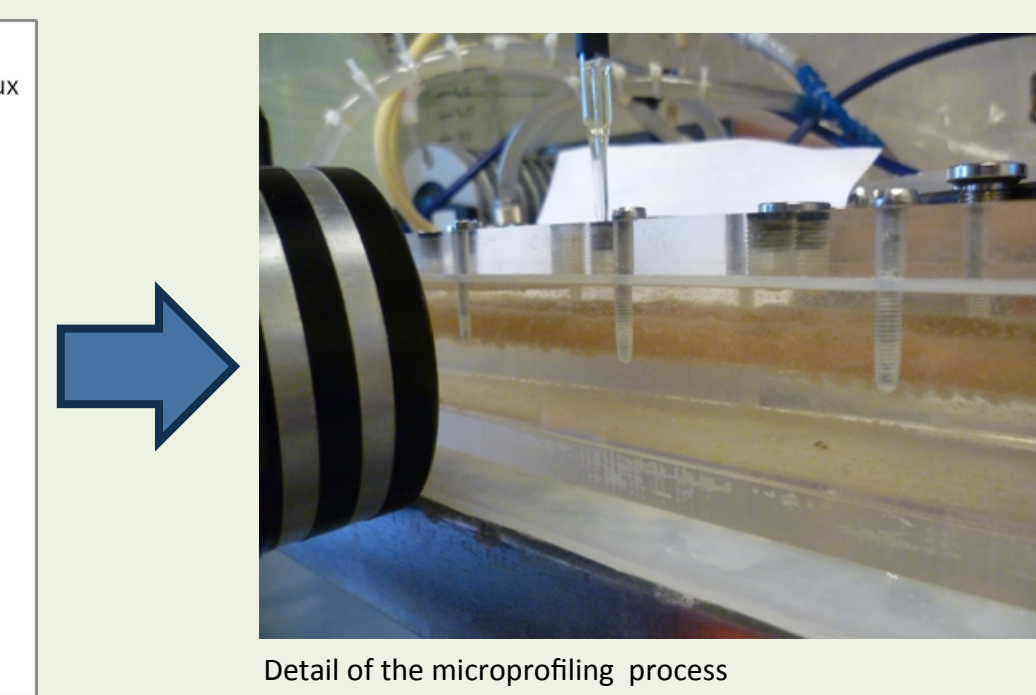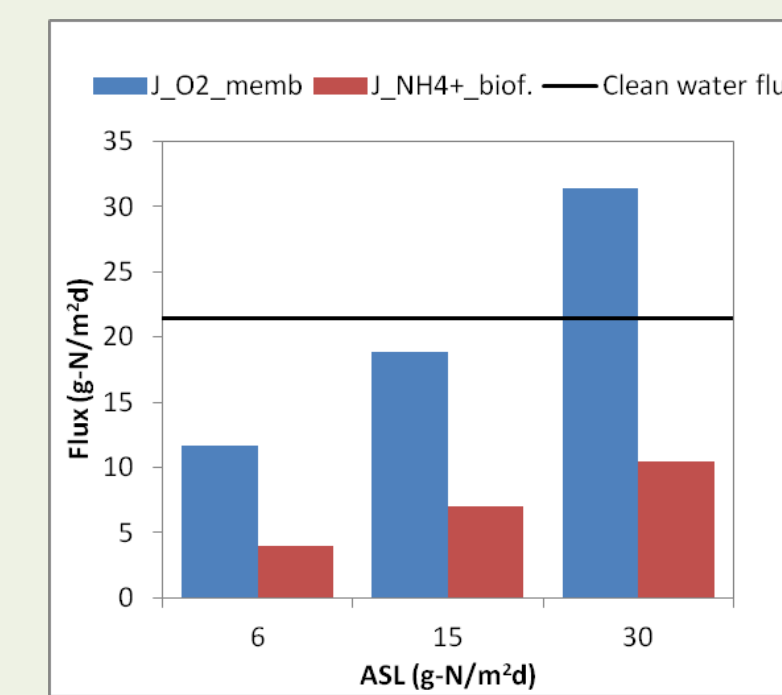

Microprofile analyses show enhanced in-situ microbial activities within the aerobic biofilm region when they have higher NH<sub>4</sub><sup>+</sup> availability

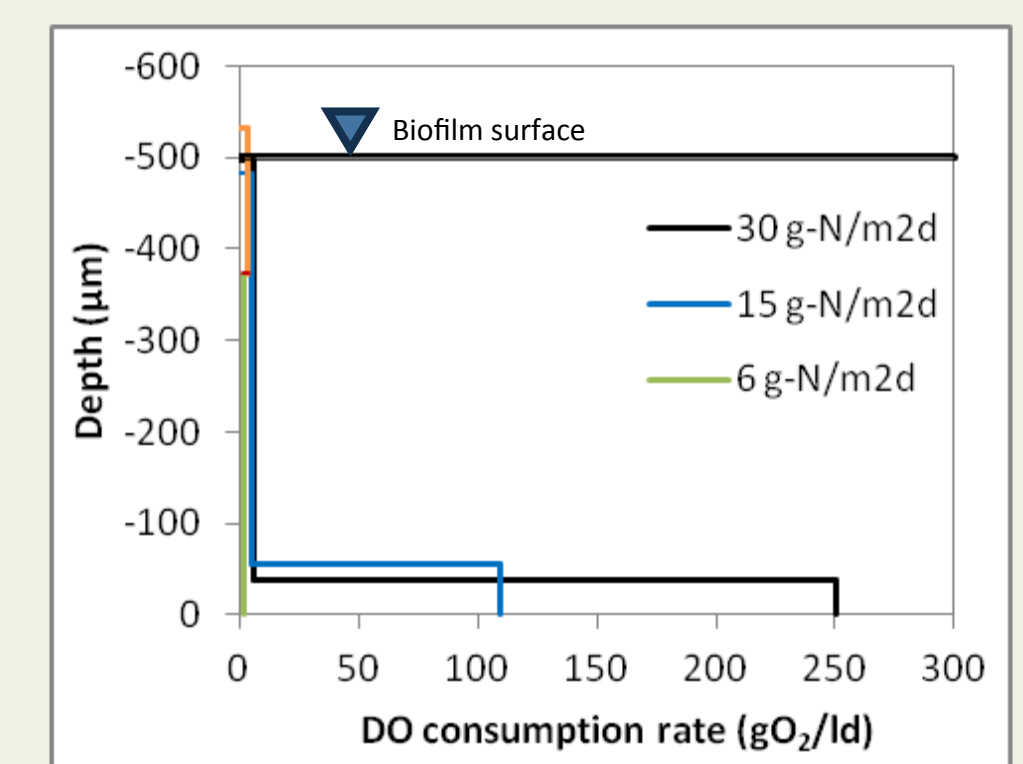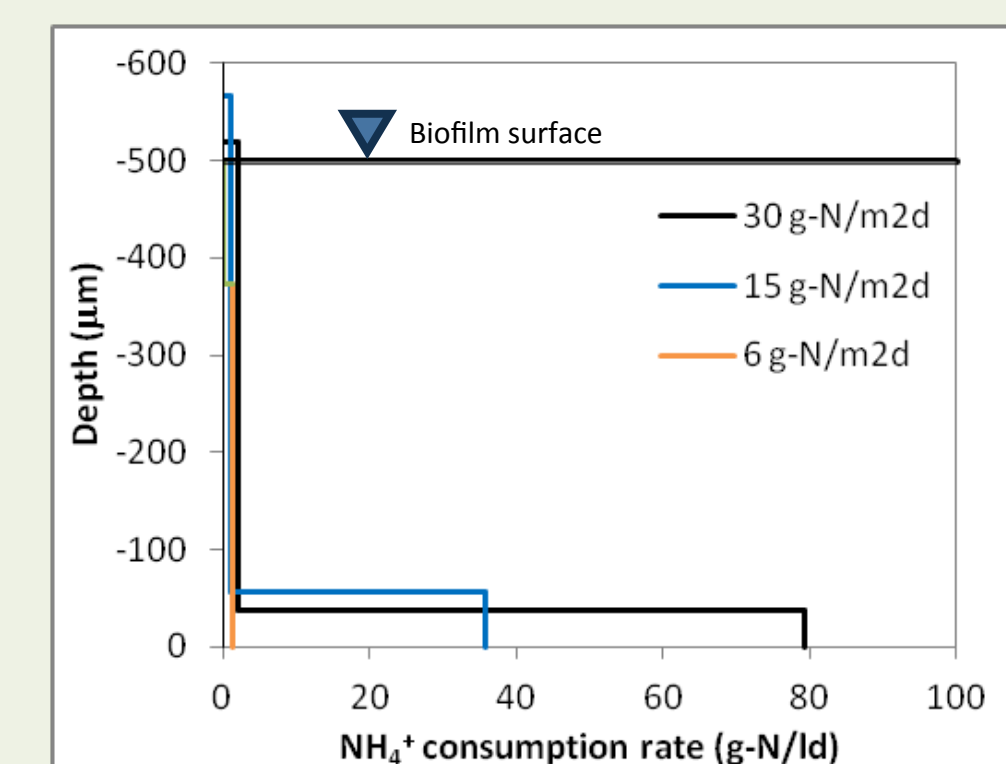


## 5. Periodic aeration impacts microbial activity

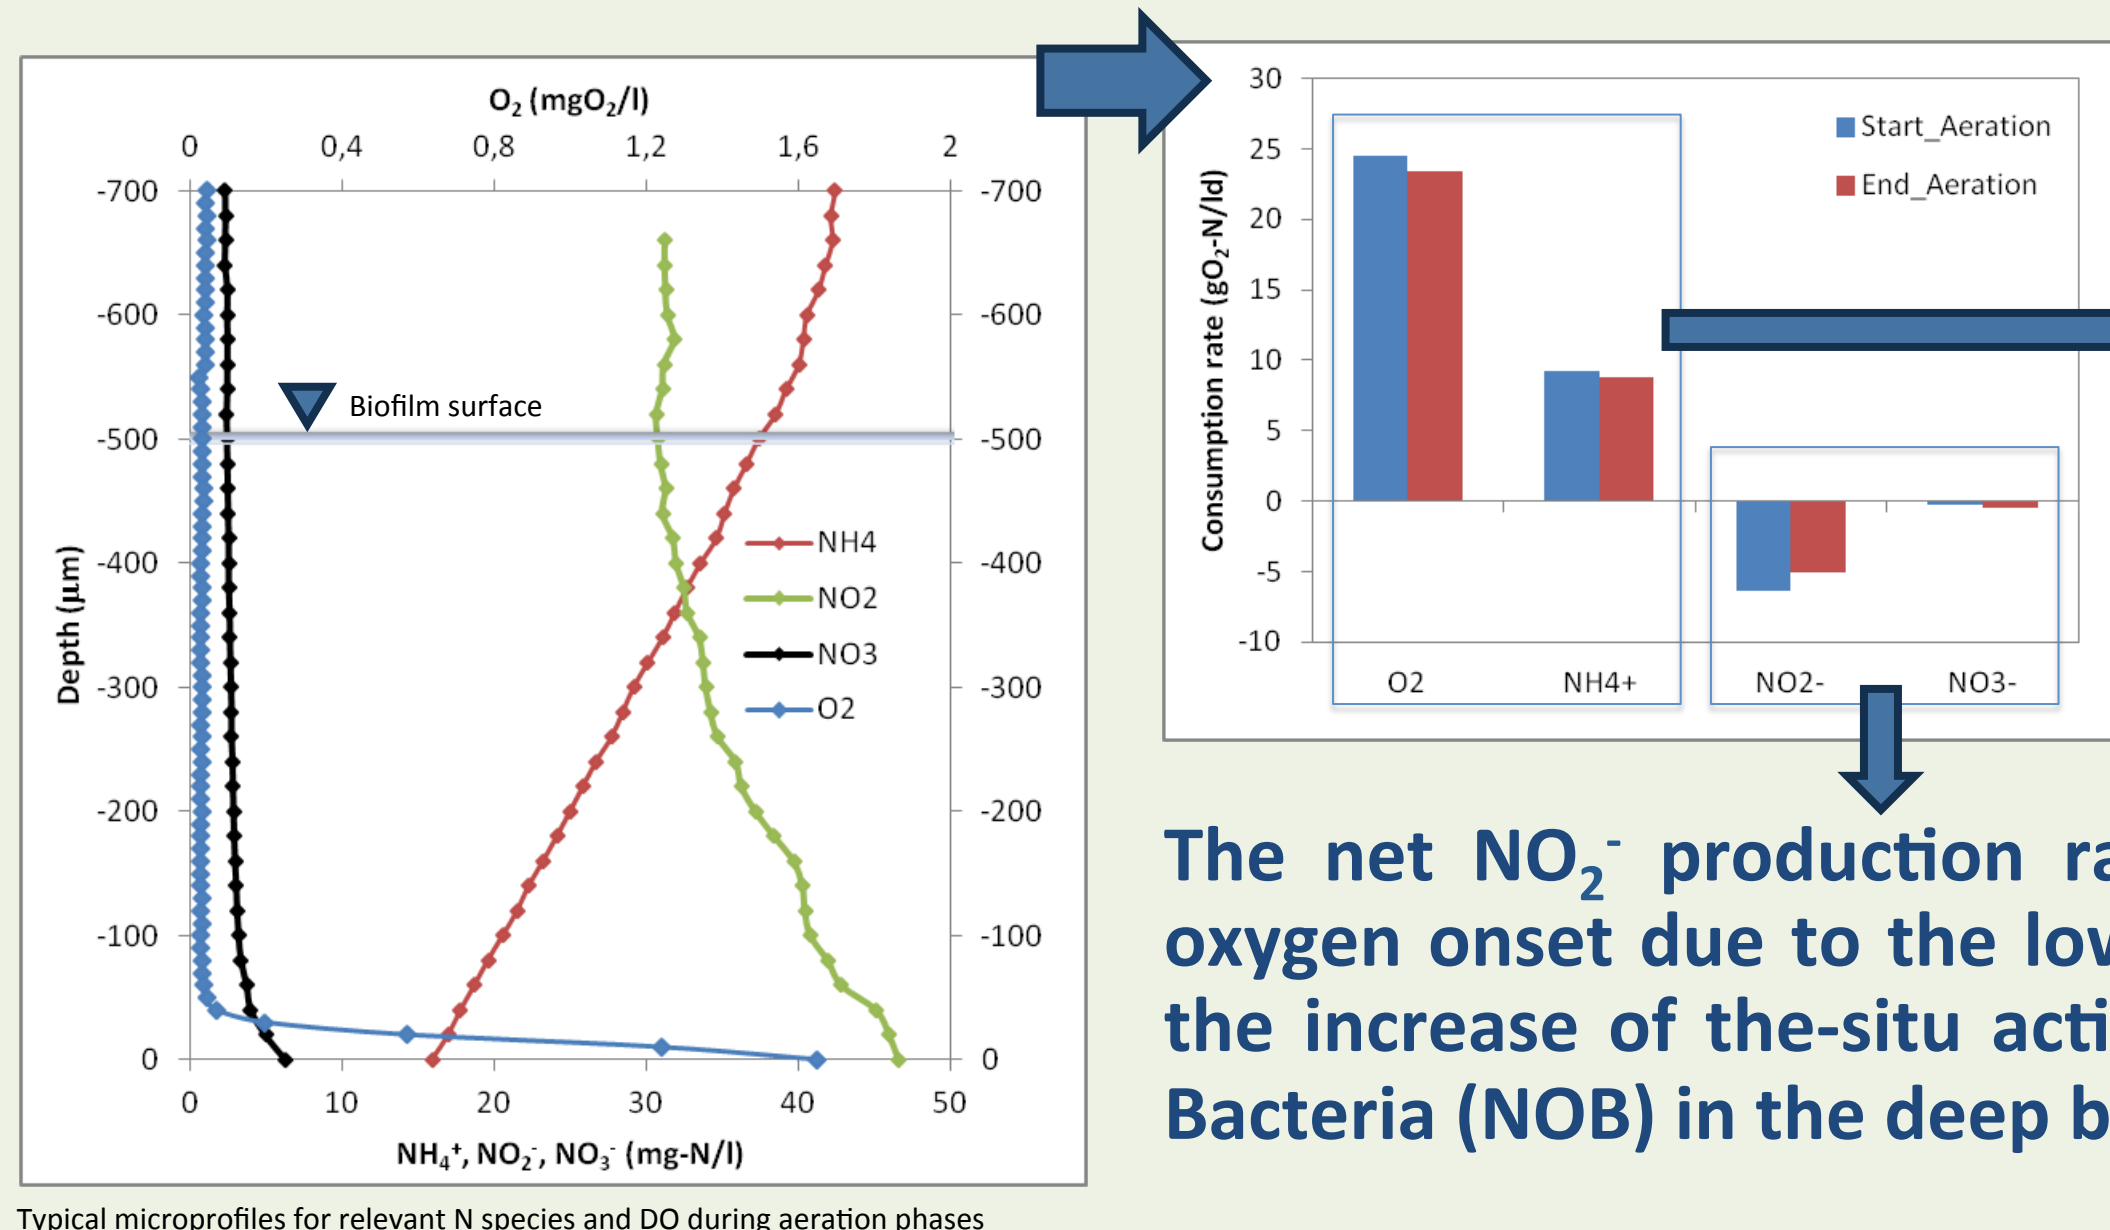


Famine conditions during non-aerated periods stimulate in-situ DO and NH<sub>4</sub><sup>+</sup> consumption rates once O<sub>2</sub> becomes available.

The net NO<sub>2</sub><sup>-</sup> production rates decrease after the oxygen onset due to the lower DO flux, but also to the increase of the in-situ activity of Nitrite Oxidizing Bacteria (NOB) in the deep biofilm region.

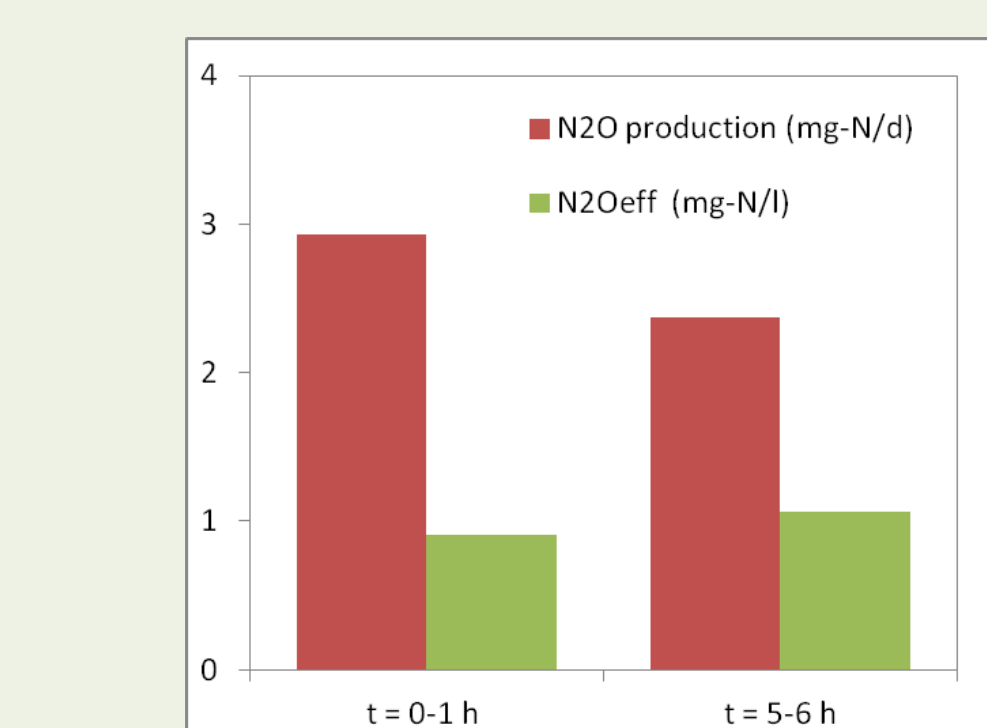

The N<sub>2</sub>O production within the biofilm declines with time after the start of the aeration phase. 40% of the N<sub>2</sub>O produced permeates through the aeration membrane

## 5. Conclusions - Outlook

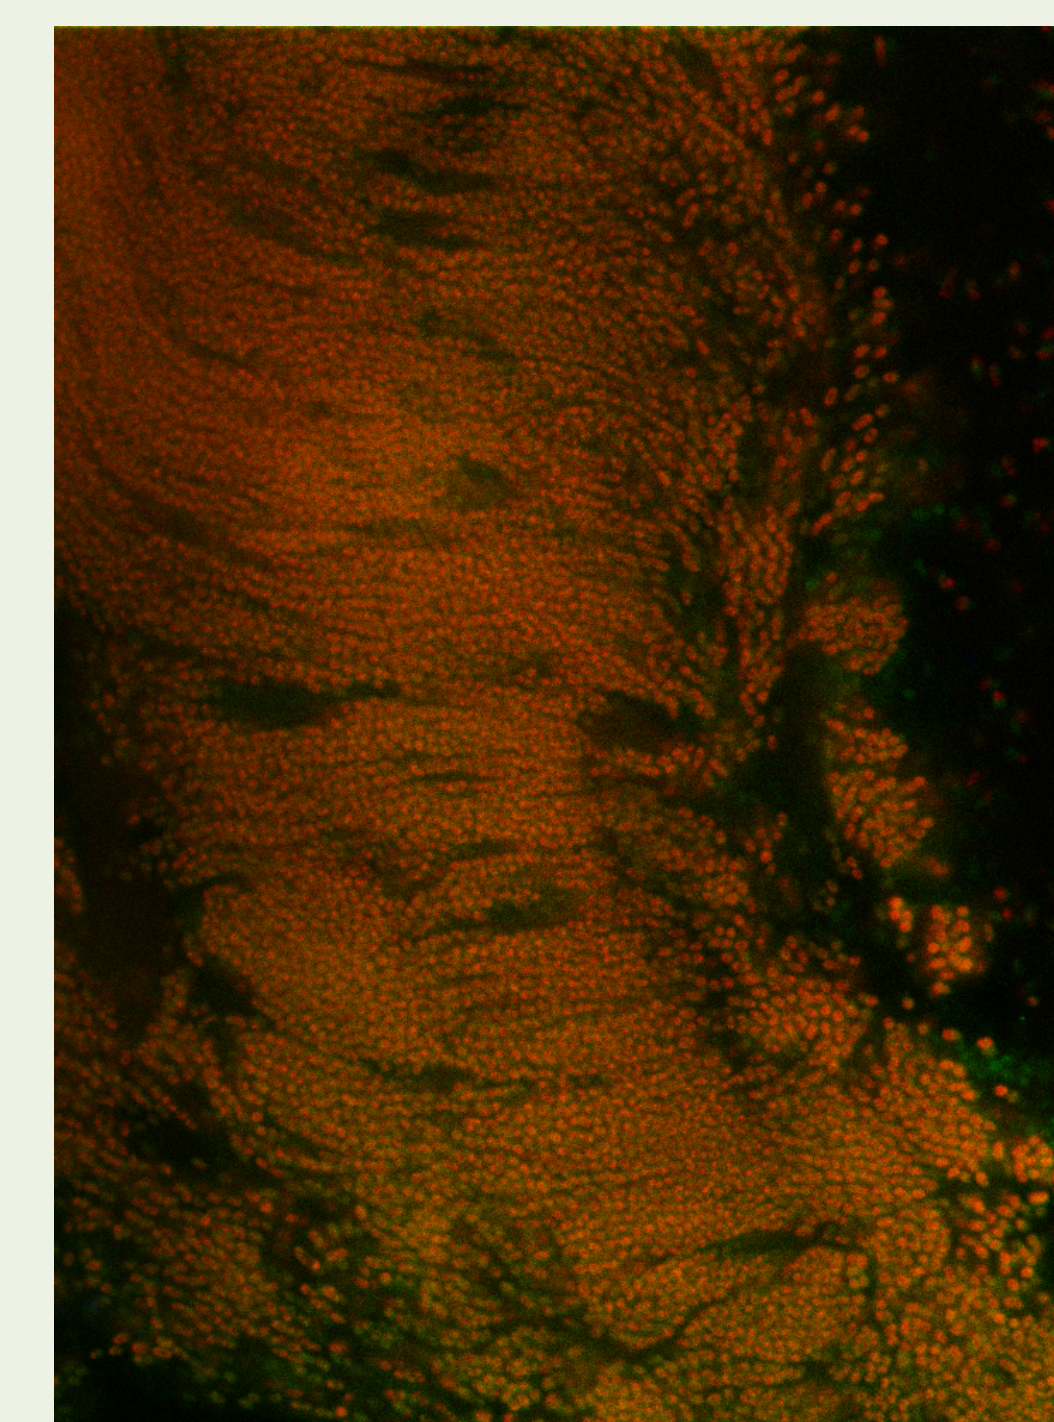

Detail of AOB in MABR for CANR

- High NH<sub>4</sub><sup>+</sup> loads increase substrate availability in the biofilm base and stimulate deep in-situ microbial activities in MABRs. This enhancement results in OTRs 50% higher than the ones predicted from experiments without biofilm and explains divergences among literature results.
- The success of periodic aeration in accumulating NO<sub>2</sub><sup>-</sup> for successful CANR resides on its potential to inhibit NOB activity. The mechanism of inhibition remains unknown, but seems to decline with time. The reactor has higher N<sub>2</sub>O emissions by being operated this way, but up to 40% can be recovered.

Biofilms grown on aeration membranes enhance the mass transfer capabilities of these systems and allow microbial community management for a cleaner and more cost-effective wastewater treatment